

# SPINLED Q

## SpinLed Square

### DIMENSIONS

L 218 mm  
P 218 mm  
H 22.4 mm

### WEIGHT

800 g

### CRI

97

### TOTAL LUMINOUS FLUX

4756 lm

### CHANNEL LUMINOUS FLUX

2700 K - 1984 lm  
5700 K - 2272 lm

### POWER

40 W

### POWER SUPPLY

100 ~ 240 Vac (Remote)

### CONTROL MODES

Casambi/Buttons

### PROTECTION CLASS


IP 20

### CERTIFICATION

CE/ROHS

### MATERIAL

Anodized aluminium

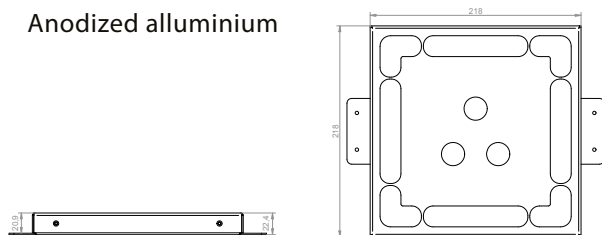

### FINISHINGS



BLACK



WHITE RAL 9010



GOLD



SILVER

# SPINLED R

## SpinLed Rectangular

### DIMENSIONS

L 336 mm  
P 218 mm  
H 22.4 mm

### WEIGHT

1000 g

### CRI

97

### TOTAL LUMINOUS FLUX

5460 lm

### CHANNEL LUMINOUS FLUX

2700 K - 2336 lm  
5700 K - 2624 lm

### POWER

50 W

### POWER SUPPLY

100 ~ 240 Vac (Remote)

### CONTROL MODES

Casambi/Buttons

### PROTECTION CLASS


IP 20

### CERTIFICATION

CE/ROHS

### MATERIAL

Anodized aluminium

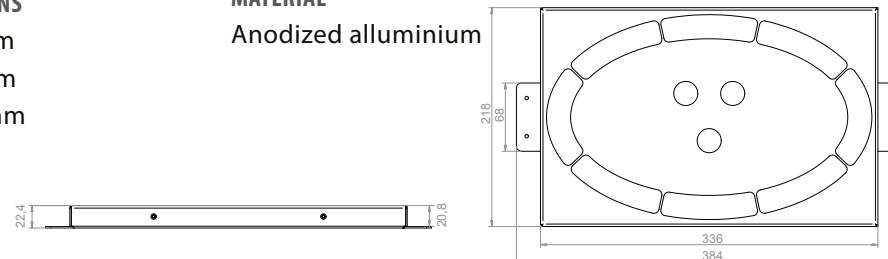

### FINISHINGS



BLACK



WHITE RAL 9010



GOLD



SILVER